

*For Residential and Commercial Applications*

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

## AU2 Male Gas Adapter - Male Flare x Male Iron Pipe

**Use:** For use with natural, manufactured, mixed, liquefied petroleum gases, and LP gas-air mixtures.


**Operating Specifications:**

**Temperature:** -40° - 150° F

**Pressure:** 1/2 PSI maximum

<b>FITTING MATERIAL SPECIFICATIONS</b>	
<b>Brass Body</b>	Brass
<b>Steel Body</b>	Steel, plated

<b>PART DIMENSIONS (Inches)</b>			
<b>Model</b>	<b>DIA. A</b>	<b>DIM. B</b>	<b>DIM. C</b>
AU2-8	0.438	1.81	7/8
AU2-8-6	0.438	1.61	3/4
AU2-6-8	0.312	1.78	7/8
AU2-6	0.312	1.55	11/16

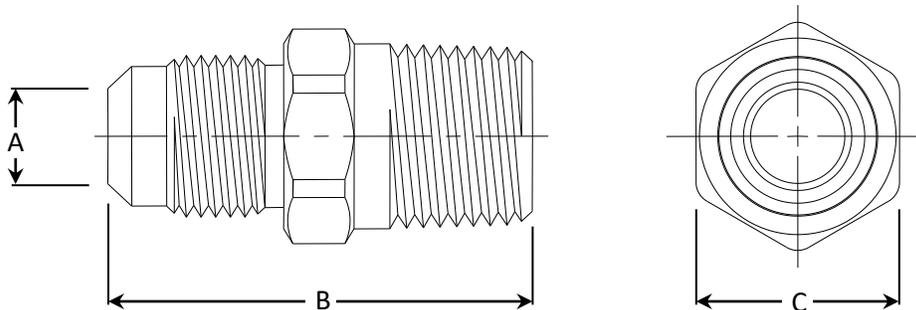

**Part Listing:**

- AU2-6                      3/8" OD flare x 3/8" MIP (1/8" FIP tapped), brass
- AU2-6 B                    3/8" OD flare x 3/8" MIP (1/8" FIP tapped), brass, bulk packed
- AU2-6S                    3/8" OD flare x 3/8" MIP (1/8" FIP tapped), steel
- AU2-6-8                    3/8" OD flare x 1/2" MIP (3/8" FIP tapped), brass
- AU2-6-8 BT                3/8" OD flare x 1/2" MIP (3/8" FIP tapped), brass, generic bag
- AU2-6-8S                 3/8" OD flare x 1/2" MIP (3/8" FIP tapped), steel
- AU2-6-8S B                3/8" OD flare x 1/2" MIP (3/8" FIP tapped), brass, bulk packed
- AU2-8-6                    1/2" OD flare x 3/8" MIP, brass
- AU2-8-6S                  1/2" OD flare x 3/8" MIP, steel
- AU2-8-6S B                1/2" OD flare x 3/8" MIP, steel, bulk
- AU2-8                        1/2" OD flare x 1/2" MIP (3/8" FIP tapped), brass

*This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company, and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.*



## AU2 Male Gas Adapter - Male Flare x Male Iron Pipe

### Part Listing (con't):

<input type="checkbox"/>	AU2-8 B	1/2" OD flare x 1/2" MIP (3/8" FIP tapped), brass, bulk packed
<input type="checkbox"/>	AU2-8S	1/2" OD flare x 1/2" MIP (3/8" FIP tapped), steel
<input type="checkbox"/>	AU2-8-12S	1/2" OD flare x 3/4" MIP (1/2" FIP tapped), steel
<input type="checkbox"/>	AU2-14-12	7/8" OD flare x 3/4" MIP (1/2" FIP tapped), brass
<input type="checkbox"/>	AU2-14-16	7/8" OD flare x 1" MIP (3/4" FIP tapped), brass

- For use with CSA listed ANSI Z21.24 / CSA 6.10 connectors
- For use with CSA listed ANSI Z21.75 / CSA 6.27 connectors

*This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company, and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.*