


Assembly Instructions: 2073-LP, 2074-LP (Smyth)

IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, contact the place of purchase.

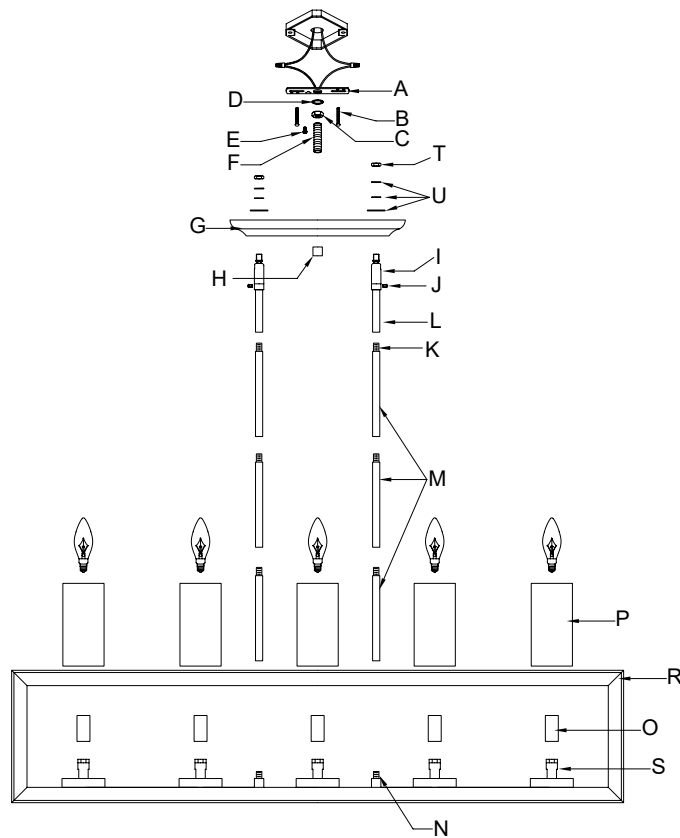

PREPARING FOR INSTALLATION

Carefully remove the new fixture from the carton as well as the yellow bag that holds all of the parts. See the important notes above. Shut off power at the circuit breaker and remove old fixture from wall, including the old mounting strap.

1. From the parts bag remove the mounting strap assembly. One end of nipple (F) should be attached to mounting strap (A) with washer (C) and hex nuts (D) in place. The other end should have decorative nut (H) attached.
2. Attach mounting strap (A) to the junction box using mounting screws (B) and a screwdriver. Tighten securely. Unscrew decorative nut (H) from nipple (F) and place it aside for later use.

ASSEMBLING THE FIXTURE

3. Measure to determine the correct length of rods needed for proper hanging height. The rods can be connected to the canopy using swivel joint (I). Each rod can be connected to another by threading nipple (K) of one rod into the bottom threads of another rod. To lengthen the fixture, add additional rods. If additional rods are needed, contact the place of purchase to order. To shorten the fixture, evenly remove any undesired rods from each side and trim the wires to the desired length, adding at least 8 to 10 inches of wire to the desired length. Keep in mind that you must use at least one set of the provided 12 inch rods (M) to hang the fixture.

Decide the height and thread the wires through one of either rods. Pull the wires until taut before threading the rods together. Thread the bottom of rods (M or L) onto posts (N). Thread and slide the threaded nipple of the top rods into swivel joints (I). Lock the top rods in place by tightening screws (J) into the sides of swivel joint (I). Secure swivel joints (I) onto canopy (G) and tighten hex nuts (T) and washers (U) to ensure that swivel joints (I) are secure. Pull the fixture's wires through the top of the rods. Cut away excess wire.

How to Identify the Fixture's Wires

Hot	Neutral	Ground
Smooth	Ribbed	Bare Metal, Green, or
Black	White	Green Inner Thread
Black Inner Thread	White Inner Thread	

CONNECTING THE WIRES

4. Have an assistant support the fixture's weight while completing the wiring. Thread the fixture's wires through canopy loop and nipple. Attach the fixture's wires to the house wires which were pulled earlier from the junction box through the mounting strap (A). Connect black to black (transparent wire with black inner thread or smooth); white to white (transparent wire with white inner thread or ribbed); ground to ground (green, transparent wire with green inner thread, or copper). Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) coming from the junction box, locate ground screw (E) on the mounting strap and wrap the fixture's ground wire around the green ground screw (E). Use a screwdriver to secure ground screw (E) onto the mounting bracket. Tuck all wires neatly into the junction box.

FINISHING THE INSTALLATION

5. Push canopy (G) up to the ceiling and tightly thread nut (H) onto the exposed threads of nipple (F). Slide candle sleeves (O) over the sockets. Slide glass shades (P) over the sockets within frame (R). Install light bulbs (not provided) in accordance with the fixture's specifications. Do not exceed the maximum recommended wattage.

Your installation is now complete. Turn on the power and test the fixture.

CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.

