


KM 6360

## Induction Cooktop

with PowerFlex cooking area for maximum versatility and performance.

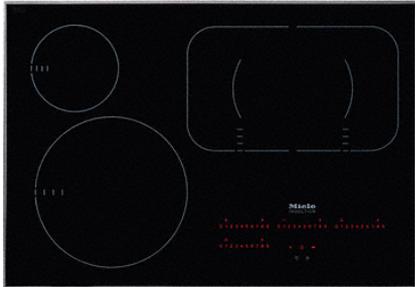

- Quick selection using numerical linear keybanks - Direct control plus
- Attractive design - 30 5/8 (775)Inch wide with stainless steel frame
- Versatile and fast - 4 cooking zones incl. 1 PowerFlex area
- Communication with the hood - automatic function Con@ctivity
- Broad performance spectrum - keeping warm function and TwinBooster

EAN: 4002515472910 / material number: 09775890

<b>Type of heating</b>	
Fuel type	Induction
<b>Construction type</b>	
Independent of oven	•
<b>Design</b>	
Elegant glass ceramic surface	•
Ceramic surface color	Black
Print design	LightPrint
All-round stainless steel frame	•
Proud-mounted installation	•
<b>Ring features</b>	
No. of rings	4
<b>PowerFlex cooking zone</b>	
Number	2
Size in inches (mm)	Ø 150 – 230
Max. rating in W	2200
Max. booster rating in W	3100
Max. TwinBooster rating in W	3850
<b>Ring</b>	
Position	front left
Type	Variable cooking zone
Size in inches (mm)	Ø 180-280
Max. rating in W	2500
Max. booster rating in W	3100
Position	rear left
Type	Variable cooking zone
Size in inches (mm)	Ø 100-160
Max. rating in W	1450
Max. booster rating in W	1900
Position	Rear centre right
Type	PowerFlex bridge
Size in inches (mm)	230x390
Max. rating in W	3550
Max. booster rating in W	5000
Max. TwinBooster rating in W	7700
<b>Control panel</b>	
Operation via touchpad sensors	Multiple direct dial
Display color	Red
Pan/Pan-size sensors	•
Stop & Go function	•
Minute minder	•
Automatic switch-off for all rings	•
AutoBoost	•
Keep-warm function	•
Individual setting options (e.g. acoustic signal tones)	•
<b>Cleaning convenience</b>	
Easy to clean ceramic surface	•


More information at [www.MieleUSA.com](http://www.MieleUSA.com)

For further information please see next page...

KM 6360

Induction Cooktop

with PowerFlex cooking area for maximum versatility and performance.

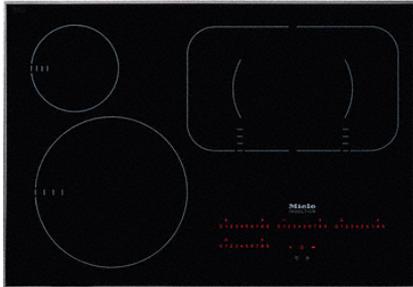


<b>Safety</b>	
Safety cut-out	•
Lock function	•
System lock	•
Overheating protection	•
Residual heat indicator	•
<b>Technical data</b>	
Dimensions in in. (width)	30 5/8 (775)
Dimensions (height) in in.(mm)	5 1/8 (128)
Built-in height with mains connection box in in.(mm)	4 7/8 (121)
Dimensions (depth) in in.(mm)	21 1/2 (544)
Cutout dimensions in in. (width) with proud-mounted installation	28 5/8 (724)
Cutout dimensions in in. (depth) with proud-mounted installation	20 1/2 (518)
Weight in lbs. (kg)	46 (21)
Total connected load in kW	7.7
Power cord length in m	3 (1.2)
<b>Standard accessories</b>	
Connection wire	•

KM 6360

Induction Cooktop

with PowerFlex cooking area for maximum versatility and performance.

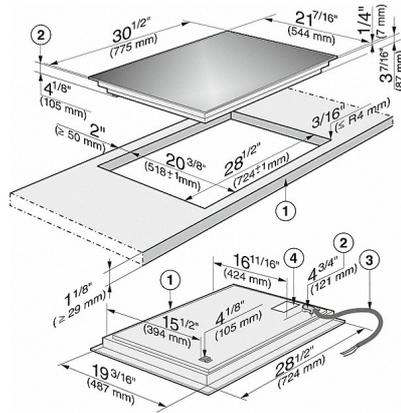

KM 6360 (Installation drawing)

- 1) Front
- 2) Casing depth
- 3) Flexible metal Extension hose L = 47 1/4" (1200 mm)
- 4) Data plate