



**15" SIGNATURE SERIES  
REFRIGERATOR**



**ecofriendly**  
R600a Refrigerant



JOB	
AREA	
ITEM NO.	
MODEL NO.	



Glass Door Model



Solid Door Model

MODELS	DESCRIPTION
HP15RS-4-1R/L	Indoor Signature Series Refrigerator Solid Stainless Steel Door
HP15RS-4-2R/L	Indoor Signature Series Refrigerator Solid Panel Ready Door
HP15RS-4-3R/L	Indoor Signature Series Refrigerator Stainless Steel Glass Door
HP15RS-4-4R/L	Indoor Signature Series Refrigerator Panel Ready Glass Door
HP15RO-4-1R/L	Outdoor Signature Series Refrigerator Solid Stainless Steel Door
HP15RO-4-2R/L	Outdoor Signature Series Refrigerator Solid Panel Ready Door
HP15RO-4-3R/L	Outdoor Signature Series Refrigerator Stainless Steel Glass Door
HP15RO-4-4R/L	Outdoor Signature Series Refrigerator Panel Ready Glass Door

**KEY PRODUCT FEATURES AND BENEFITS**

- 1000 BTU/hr capacity delivers industry’s most energy efficient cool down, indoors or outdoors
- Up to 70% faster cooling speeds than leading competitor
- Variable speed compressor minimizes sound; up to 30% quieter than competitors
- Commercial-grade all stainless steel interior and exterior provide superior durability and easy cleaning
- Perlick Anti-Condensation System™ eliminates condensation from forming on the cabinet (outdoor models only)

**Quick Features:**

- Full extension shelving provides faster and safer product access with no reaching in the back of the cabinet; shelves fully extend on vibration dampened stainless steel ball bearing glides
- Industry’s best full 6 year warranty for owner ease of mind
- Available with stainless steel or panel ready door to match your design style
- Audible door alarm warns user if door is held open
- Selectable blue or white LED lighting
- R600a Natural Refrigerant offers maximum energy efficiency with zero global warming potential
- Storage for up to 66 cans



**15" SIGNATURE SERIES  
REFRIGERATOR**

MODEL NUMBERS		HP15RS	HP15RO
MODEL DESCRIPTION		15" Indoor Refrigerator	15" Outdoor Refrigerator
ATTRIBUTES			
Perlick Anti-Condensation System		NO	YES
Energy Star Certified		YES	YES
OVERALL DIMENSIONS	Width - in. (mm)	14-7/8" (378 mm.)	14-7/8" (378 mm.)
	Depth - in. (mm)	24" (610 mm.)	24" (610 mm.)
	Height - in. (mm)	34-1/4" (870 mm.)	34-1/4" (870 mm.)
OPENING DIMENSIONS	Width - in. (mm)	15" (381 mm.)	15" (381 mm.)
	Depth - in. (mm)	24-7/8" (632 mm.)	24-7/8" (632 mm.)
	Height - in. (mm)	34-1/2" (876 mm.)	34-1/2" (876 mm.)
INTERNAL VOLUME Net. Cu. Ft. (L)		2.8 cu. ft.	2.8 cu. ft.
SHIPPING WEIGHT Lbs. (kg.)		150 lbs (68.04 kg)	150 lbs (68.04 kg)
ELECTRICAL SPECIFICATIONS	Electrical Supply	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph
	Running Load Amps	2.1 amps	2.1 amps
	Electrical Connection	Cord connected	Cord connected
	Cord Plug Type	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P
	Cord Length	6'	6'
	Defrost Initiation	Automatic	Automatic
	Defrost Type	Off cycle	Off cycle
	Thermostat	Digital	Digital
REFRIGERATION SPECIFICATIONS	Lighting Type	LED	LED
	Refrigerant	R600a (38g)	R600a (38g)
	Expansion Device	Capillary Tube	Capillary Tube
	Temperature Settings F (C)	33° (0.5) - 48° (8.8) <b>Factory Set Point 36°(2.2°)</b>	33° (0.5) - 48° (8.8) <b>Factory Set Point 36°(2.2°)</b>
	Heat Rejection (at 75°F)	300 BTU/hr	300 BTU/hr
	Pull Down Capacity	1000 BTU/hr	1000 BTU/hr
Front Vented	Yes	Yes	
PLUMBING		None Required	None Required

*Installation Notes: To achieve 24" install depth, you must recess the outlet 7/8" into the wall directly behind the unit, or place electrical connection adjacent to the installation cavity.*

**ACCESSORIES**

MODEL NOS.	DESCRIPTION
(L)	Factory Installed Lock
67990-L/R	Stacking Kit for HP15 models
66736-15	Caster Kit for HP15 models

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit [perlick.com](http://perlick.com)




**15" SIGNATURE SERIES  
REFRIGERATOR**

CUSTOMER MODEL NUMBER	REGULATORY MODEL NUMBER	Hinge Side	Lock
HP15RS-4-1L	HP15RS4C-00-SLF0R	Left	No
HP15RS-4-1R	HP15RS4C-00-SRF0R	Right	No
HP15RS-4-2L	HP15RS4C-00-PL00R	Left	No
HP15RS-4-2R	HP15RS4C-00-PR00R	Right	No
HP15RS-4-3L	HP15RS4C-00-TLF0R	Left	No
HP15RS-4-3R	HP15RS4C-00-TRF0R	Right	No
HP15RS-4-4L	HP15RS4C-00-RL00R	Left	No
HP15RS-4-4R	HP15RS4C-00-RR00R	Right	No
HP15RS-4-1LL	HP15RS4C-00-SLFLR	Left	Yes
HP15RS-4-1RL	HP15RS4C-00-SRFLR	Right	Yes
HP15RS-4-2LL	HP15RS4C-00-PL0LR	Left	Yes
HP15RS-4-2RL	HP15RS4C-00-PR0LR	Right	Yes
HP15RS-4-3LL	HP15RS4C-00-TLFLR	Left	Yes
HP15RS-4-3RL	HP15RS4C-00-TRFLR	Right	Yes
HP15RS-4-4LL	HP15RS4C-00-RL0LR	Left	Yes
HP15RS-4-4RL	HP15RS4C-00-RR0LR	Right	Yes
HP15RO-4-1L	HP15RO4C-00-SLF0R	Left	No
HP15RO-4-1R	HP15RO4C-00-SRF0R	Right	No
HP15RO-4-2L	HP15RO4C-00-PL00R	Left	No
HP15RO-4-2R	HP15RO4C-00-PR00R	Right	No
HP15RO-4-3L	HP15RO4C-00-TLF0R	Left	No
HP15RO-4-3R	HP15RO4C-00-TRF0R	Right	No
HP15RO-4-4L	HP15RO4C-00-RL00R	Left	No
HP15RO-4-4R	HP15RO4C-00-RR00R	Right	No
HP15RO-4-1LL	HP15RO4C-00-SLFLR	Left	Yes
HP15RO-4-1RL	HP15RO4C-00-SRFLR	Right	Yes
HP15RO-4-2LL	HP15RO4C-00-PL0LR	Left	Yes
HP15RO-4-2RL	HP15RO4C-00-PR0LR	Right	Yes
HP15RO-4-3LL	HP15RO4C-00-TLFLR	Left	Yes
HP15RO-4-3RL	HP15RO4C-00-TRFLR	Right	Yes
HP15RO-4-4LL	HP15RO4C-00-RL0LR	Left	Yes
HP15RO-4-4RL	HP15RO4C-00-RR0LR	Right	Yes



**15" SIGNATURE SERIES  
REFRIGERATOR**

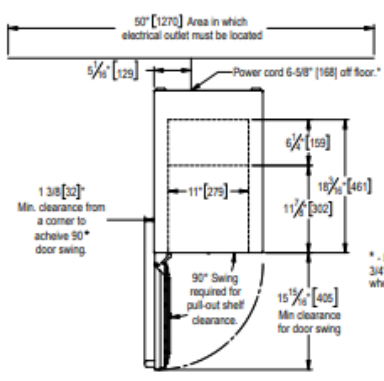

\* - Leg leveler can add 3/4" [19] to these dimensions when fully extended.

**Door Models**

