


## ASSEMBLY INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS

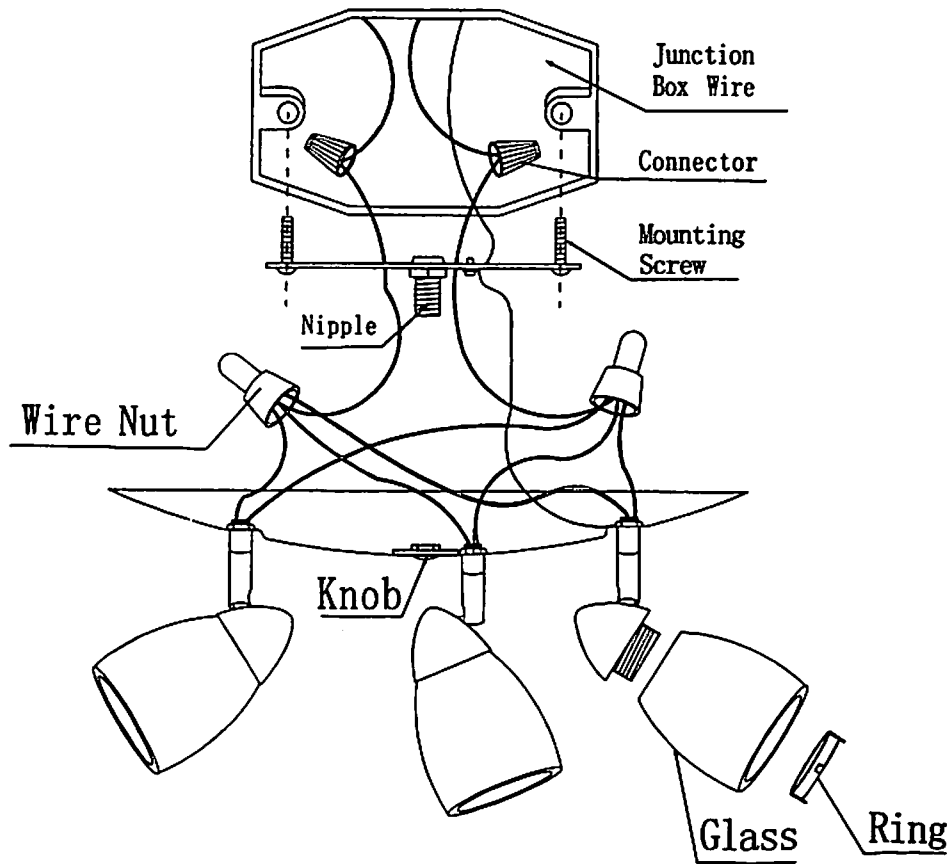

**WARNING :** Before starting installation ,turn off power by removing fuses or turning off circuit breakers .Turning off the power by using the light switch is not sufficient to prevent electrical shock .If you don't have the electrical experiences needed ,have the fixture installed by a qualified licensed electrician .

**CAUTION :** This is just an installation "guide",please check with your local certified electrician for proper installation per your city code .We cannot be held reliable for the use or misuse of the installation guide provided.

### INSTALLATION STEPS

- 1.**Unpack the fixture.** To protect the finish ,place all parts on a soft surface. You should have received the following : glass shade ,socket rings,cross bar wire connectors ,mounting screws ,nipple ,knob .
- 2.Insert nipple into hole fo crossbar. Attach the crossbar to the ceiling outlet box using mounting screws furnished .
- 3.**Wiring :**Collect white fixture wire to white supply wire using wire connector . Following that,collect black fixture wire to black supply wire in the same manner . Install the fixture ground wire under the green ground screw on the crossbar then connect supply ground wire from the outlet box to the green ground screw as well .  
**NOTE:**White fixture wires and Black fixture wires are both assembled into one extra wire in advance for your better installation .
- 4.Tuck the wires carefully inside the outlet box .
- 5.Raise the canopy toward the nipple and secure in place with knob.
- 6.**Sit cone glass shade** on each socket then rotate socket ring until fastens the glass.
- 7.**Slide GU10 50 W MAX bulb** deep into the socket then revolve until locks the socket.
- 8.Restore Power .Your new fixture is now ready to use .