

Specifications

3/4" Thermostatic

Valve & Trim


FEATURES:

- Cast Brass Construction
- Thermostatic valve cartridge with cover plate: 18.30.147
- Thermostatic reverse cartridge with cover plate: 18.30.161
- 14.28 GPM @ 56PSI top exit & 11.10 GPM bottom exit
- NOTE: Separate shut offs required to operate system.
- Certified to meet or exceed the following codes and standards: ASME A112.18.1/CSAB 125.1-2012


1.053997 (1.053997T - Trim Only)

Tribeca X (39)

SIDE VIEW - INSTALLED

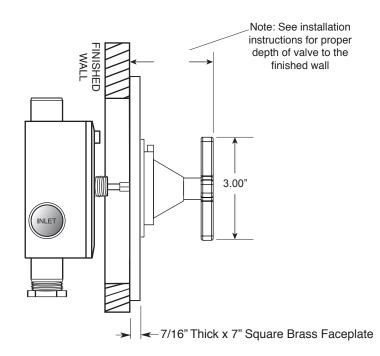

SIDE VIEW - VALVE ONLY

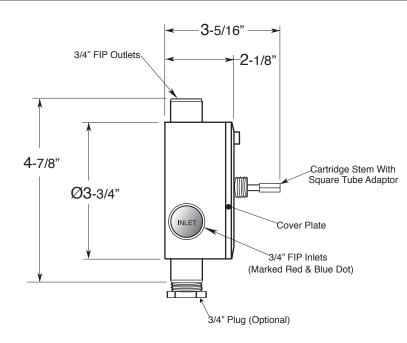

Note: Measurements are subject to change. No responsibility is assumed for use of superseded or voided pages.