

#### **CODE NUMBER**

3988238

#### DESCRIPTION

1.6 gpf, Rough Brass Finish, Anti-Flood Device Flush Connection, Single Flush, Regal® Concealed Manual Specialty Water Closet Hydraulic Flushometer.

#### **DETAILS**

• Flush Volume: 1.6 gpf (6.0 Lpf) • Finish: Rough Brass (RB)

• Valve: Diaphragm

• Supply Pipe: 1" (25mm)

• Valve Body Material: Semi-red Brass

• Fixture Type: Water Closet • Fixture Connection: Rear spud • Rough-In Dimension: 16" (406mm) • Spud Coupling: 1 ½" (38mm)

• Flush Connection: Anti-Flood Device (AFD)

#### **FEATURES**

- ADA Compliant Non-Hold-Open Actuator (specify Actuator type listed below)
- Vacuum Breaker
- Non-Hold-Open Push Button, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Handle Packing, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine Resistance
- 1" I.P.S. Wheel Handle Bak-Chek® Angle Stop
- Elbow Flush Connection and Coupling for 11/2" NPT Back Inlet (for connection in the pipe chase — flush connection through the wall not provided by Sloan)
- Actuator not included, order separately. Specify actuator type based on Hydraulic Push Button Options



with Anti-Flood Device (Anti-Flood Device NOT provided by Sloan)

## **COMPLIANCES & CERTIFICATIONS**





(cUPC Certified, BAA Compliant)

## RECOMMENDED SPECIFICATION

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi- Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

# VALVE OPERATING PRESSURE (FLOWING)

15-80 PSI (103-552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

# **DOWNLOADS**

- Sloan Stainless Steel Installation Instructions
- Control Stop Repair and Maintenance Guide
- Flush Connections Flanges Repair and Maintenance Guide
- Tail Piece Repair and Maintenance Guide
- Regal Flushometers Repair and Maintenance Guide
- Hydraulic Push Button Options
- Additional Downloads

## NOTES

All information contained within this document subject to change without notice.


Looking for other variations of the REGAL 9603 product? View the general spec sheet with all options.


Find a compatible urinal for this flushometer. Find a compatible water closet for this flushometer.

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



## **ROUGH-IN**

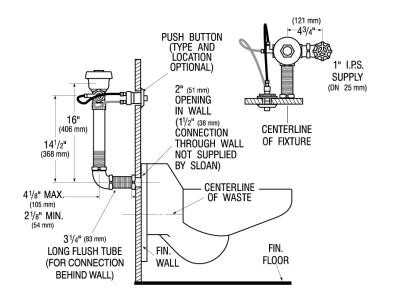



Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com