

FLOOR DRAIN

860 SERIES

Fat Max™

SPECIFICATION

Sioux Chief 860 series large capacity stainless steel floor drain shall be used where necessary in drainage systems. Drain body shall be 301 stainless steel with no-hub connection. Strainer shall be slotted and meet all applicable load requirements for intended use. Drain shall be designed with a removable stainless steel debris bucket, and all internal surfaces shall have a bead blasted finish.

MATERIAL

301 Stainless steel

STRAINER FREE AREA

3" drain = 11.25 in²

4" drain = 20.0 in²


STRAINER LOAD RATING

5,000 lbs. (heavy-duty)

DIMENSIONS

A: connection	3" no-hub	4" no-hub
B: overall height	5½"	5⅝"
C: sump height	2¾"	2¾"
D: top to flange	2"	2"
E: flange diameter	8"	10⅜"
F: strainer rim O.D.	6¾"	8⅞"
G: strainer diameter	6½"	8⅝"
sump volume	68.2 in ³	121.5 in ³

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

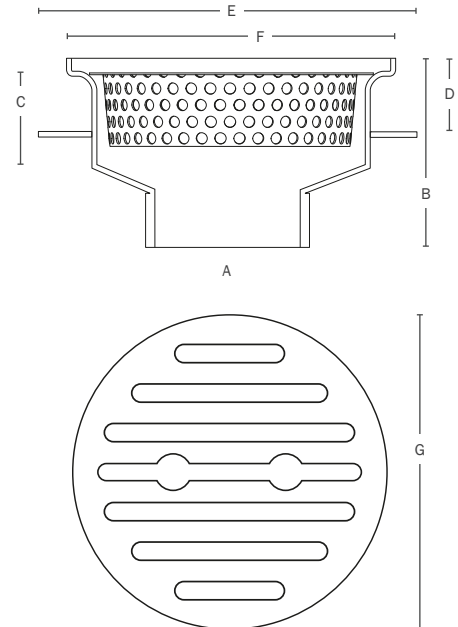

Choose Item Number

CONNECTION

- 860-3SS 3" no-hub connection
- 860-4SS 4" no-hub connection