

Aquia IV® Cube 1G® WASHLET®+ S550e Two-Piece Toilet - 1.0 and 0.8 GPF

FEATURES

- Concealed supply connection for seamless installation
- DYNAMAX TORNADO FLUSH® utilizes 360° cleaning power to reach every part of the bowl
- High-efficiency dual flush 1.0 & 0.8 GPF (3.8 & 3.0 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Design of the bowl reduces water flow resistance resulting in a quieter flushing sound
- Completely skirted design for a sleek and understated look that's easier to clean
- Universal Height
- 12" Rough-in
- Elongated front bowl and WASHLET+ S550e and tank set
- EWATER+® auto-cleans wand and bowl
- On-demand remote function cleans wand with EWATER+
- PREMIST of bowl before each use
- Remote control operated
- Auto Flush available as upgrade
- Auto Open / Close Lid
- Night Light

MODELS & COMPONENTS

- **MW4363056CUMFGA#01**
With CEFIONTECT ceramic glaze, WASHLET+ S550e with contemporary design and Auto Flush
 - CT446CUFGT40
Elongated bowl with CEFIONTECT
 - ST436UMA
Tank and cover only
 - SW3056AT40
WASHLET® S550e - Auto Flush compatible
 - 9AU321-A
WASHLET adapter
 - THU765
Auto Flush Kit
 - **MW4363056CUMFG#01**
Same as MW4363056CUMFGA without Auto Flush
 - CT446CUFGT40
Elongated bowl with CEFIONTECT
 - ST436UMA
Tank and cover only
 - SW3056AT40
WASHLET S550e
 - 9AU321-A
WASHLET adapter
- Optional Components**
- TSU08W.10
10" Unifit Rough-In
 - TSU08W.14
14" Unifit Rough-In

COLORS/FINISHES

- #01 Cotton



1G ONE GALLON PER FLUSH

DYNAMAX TORNADO FLUSH

CEFIONTECT

EWATER+

Auto Flush

UNIVERSAL HEIGHT

PRODUCT SPECIFICATION

The two-piece, ultra high-efficiency, DYNAMAX TORNADO FLUSH toilet shall be dual flush 1.0 GPF/0.8 GPF. Toilet shall have CEFIONTECT ceramic glaze, elongated front bowl, high profile tank, complete skirted bowl and chrome plated trip lever. Toilet shall be TOTO Model MW4363056CUMFG__#01.

See SW3056AT40 Specification Sheet for details on included WASHLET.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- Complies with CA Prop 65 warning requirements
- ADA compliant when installed with trip lever on the approach side



MW4363056CUMFG(A)


Aquia IV® Cube 1G® WASHLET®+ S550e Two-Piece Toilet - 1.0 and 0.8 GPF

SPECIFICATIONS

Water Use	1.0 & 0.8 GPF (3.8 & 3.0 LPF)
Flush System	DYNAMAX TORNADO FLUSH®
Min. Water Pressure	8 psi (Flowing)
Water Surface	5-5/8" x 4-1/8"
Trap Diameter	2-1/2"
Rough-in	12" (10" and 14" options available)
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	CT446CUFGT40 85 lbs ST436UMA 29 lbs
Shipping Dimensions	CT446CUFGT40 30-3/4" L x 17-3/8" W x 20-1/2" H ST436UMA 17-1/4" L x 7-1/8" W x 15-1/4" H

See SW3056AT40 Specification Sheet for details on included WASHLET.


DIMENSIONS

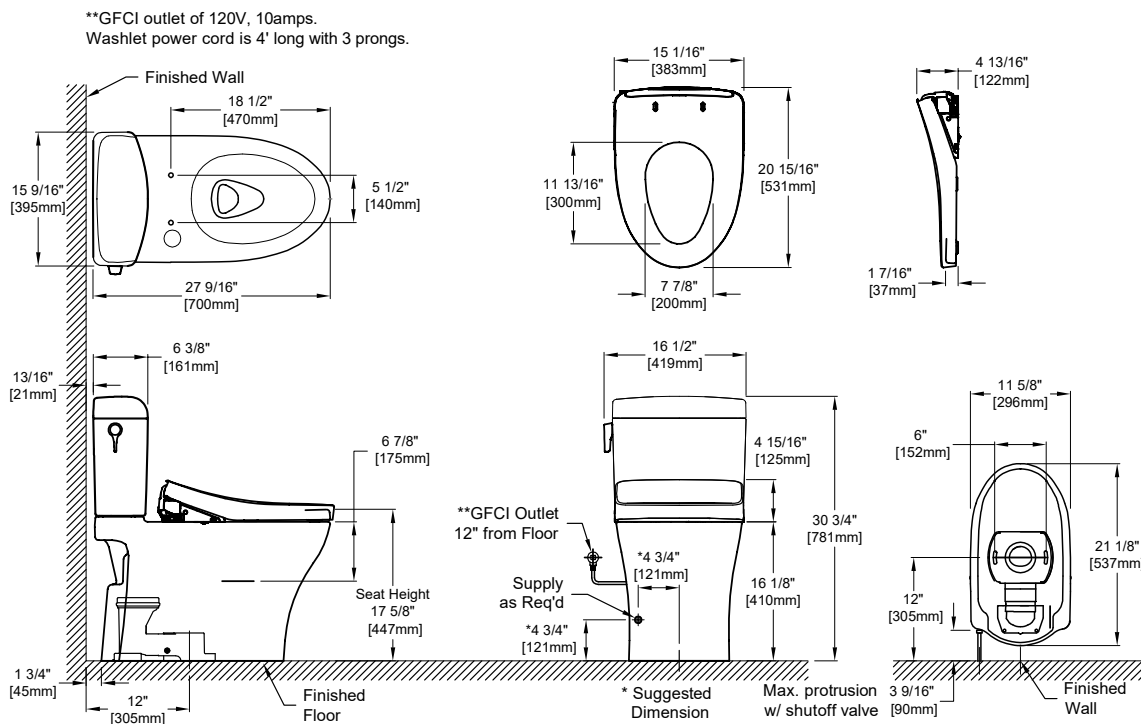

INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

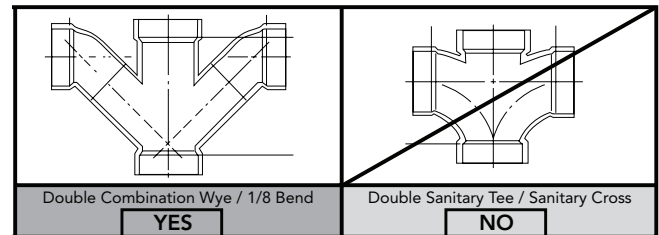

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

Ultra-low high efficiency toilets require a system with adequate supplemental flows from other water usage fixtures and a 4" ID drainline with minimum 2% slope and maximum linear runs of 60ft.

TOTO

These dimensions and specifications are subject to change without notice

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

SS-01701 v.01