### **Engineering Specification**

tor
ıl
tor's P.O. No.
entative

## **FD-430**

# Side Outlet Area Drain with Hinged Grate

#### Specification

Watts FD-430 epoxy coated steel side outlet area drain with anchor flange, 12 3/4" x 12 3/4"(324x324) square epoxy coated heel proof ductile iron hinged grate, integral trap with cleanout plug, sediment bucket, and no hub (standard) outlet.

Suffix	Pipe Sizing Description	
2	2"(51) Pipe Size	
3	3"(76) Pipe Size	
4	4"(102) Pipe Size	

Suffix	Options Description	
-1	All Nickel Bronze Top	
-T	Threaded Outlet	
-6	Vandal Proof Grate	

Load	Free Area
Rating	Sq. In.
XHD	41

Please refer to watts.com for BAA information on specific models.


#### NOTICE

The load classifications are in accordance with the American National Standard ASME A112.6.3 ASME Ratings are as follows: XHD Safe Live Load 7500-10000 lbs. (3375-4500 kg) The above categories are given as a guide only. Please consult factory.

#### NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.



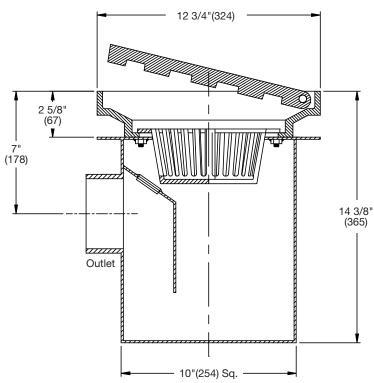

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



ES-WD-FD-430 2040 © 2020 Watts