



BACK

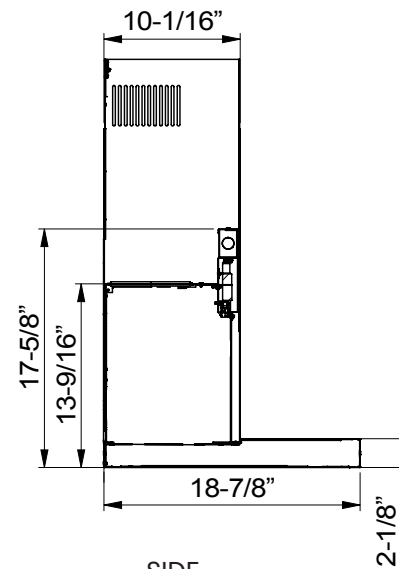

SIDE

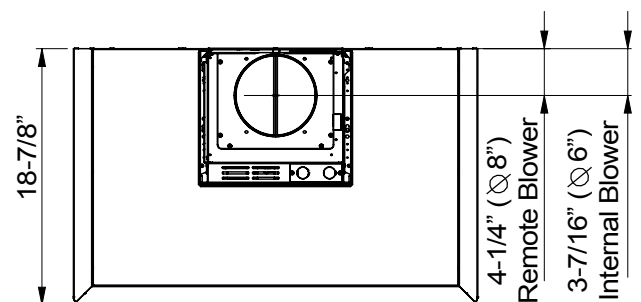

TOP

**MODEL**

<b>Stainless Steel Size</b>	DVS-E30ASSX 30"	DVS-E36ASSX 36"
-----------------------------	--------------------	--------------------

**BLOWER PERFORMANCE**

Internal Blower (CBI-290C)*	200-290 CFM, 1.4-3 sones	200-290 CFM, 1.4-3 sones
Internal Blower (CBI-600A)*	240-600 CFM, 1.8-6 sones	240-600 CFM, 1.8-6 sones
In-Line Blower (PBN-1000A)*	500-1,000 CFM, sones NA	500-1,000 CFM, sones NA
External Blower (CBE-1000)*	500-1,000 CFM, sones NA	500-1,000 CFM, sones NA

**FEATURES**

<b>Controls</b>	Invisible Touch	Invisible Touch
<b>Speed Levels</b>	3	3
<b>Auto Delay-Off</b>	Yes	Yes
<b>CleanAir Function**</b>	Yes	Yes
<b>Lighting</b>	LED, 5W x2	LED, 5W x2
<b>Tri-Level Lighting</b>	Yes	Yes
<b>Filters</b>	Aluminum Mesh x2	Aluminum Mesh x3
<b>Perimeter Aspiration System</b>	Yes	Yes
<b>Recirculating</b>	Yes	Yes
<b>Extension Duct Cover Option ADA Compliant</b>	Yes, Up to 12' Ceiling Yes, with remote option	Yes, Up to 12' Ceiling Yes, with remote option

**DUCT SPECIFICATIONS**

<b>Vertical Single Internal Blower</b>	6" Round	6" Round
<b>Vertical In-Line/External Blower</b>	10" to 8" Round***	10" to 8" Round***

**AC POWER**

<b>Hood w/ CBI-290C</b>	120V, 60Hz, Max. 1A	120V, 60Hz, Max. 1A
<b>Hood w/ CBI-600A</b>	120V, 60Hz, Max. 3A	120V, 60Hz, Max. 3A
<b>Hood w/ PBN-1000A</b>	120V, 60Hz, Max. 5.4A	120V, 60Hz, Max. 5.4A
<b>Hood w/ CBE-1000</b>	120V, 60Hz, Max. 6.6A	120V, 60Hz, Max. 6.6A

**OPTIONAL ACCESSORIES**

<b>Recirculating Kit</b>	ZRC-00VS	ZRC-00VS
<b>Remote Control</b>	14000010	14000010
<b>Duct Cover - Stainless Steel</b>	Z1C-00VS	Z1C-00VS
<b>Stainless Steel Telescopic Backsplash</b>	AK1710	AK1716
<b>Make-Up Air Kit</b>	MUA006A (600 CFM) MUA008A (1,000 CFM)	MUA006A (600 CFM) MUA008A (1,000 CFM)

<b>MOUNTING HEIGHT RANGE****</b>	24" - 36"	24" - 36"
----------------------------------	-----------	-----------

**WARRANTY**

2 year parts, 1 year labor      2 year parts, 1 year labor

<b>CEILING HEIGHT</b>		8'	8.5'	9'	9.5'	10'	10.5'	11'	12'
<b>STANDARD DUCT COVER</b>	<b>Ducted Mounting Height*</b>	24" - 34.5"	27.5" - 36"	33.5" - 36"	NA	NA	NA	NA	NA
	<b>Recirc Mounting Height*</b>	24" - 30.5"	27.5" - 36"	33.5" - 36"	NA	NA	NA	NA	NA
<b>EXTENSION DUCT COVER</b>	<b>Ducted Mounting Height*</b>	NA	24" - 24"	24" - 30"	24" - 36"	24" - 36"	24" - 36"	24" - 36"	29.5" - 36"
	<b>Recirc Mounting Height*</b>	NA	NA	24" - 26"	24" - 32"	24" - 36"	24" - 36"	24" - 36"	29.5" - 36"

\*Blower sold separately.

\*\*CleanAir turns your hood on once every four hours for 10 minutes on speed one.

\*\*\*10" round duct connects to external and in-line blower. Must transition from 10" to 8" before duct passes through ceiling. A 10" to 8" adapter is included with external and in-line blowers.

\*\*\*\*Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.

**DID YOU KNOW?**

The Perimeter Aspiration System moves airflow away from the central area of the hood and evenly distributes it through narrow openings around the perimeter of the hood. This ventilation method increases air velocity and improves the capture of cooking contaminants.

